



ADELA ENTERPRISE CO., LTD.

No.142, Lane795, Sec.1, Changyuan Rd., Wanya Village,
Huatan Hsiang, Changhua Hsien, 503, Taiwan
TEL: 886-4-787-3312~3 FAX: 886-4-786-1407
E-mail: adela@adela.com.tw http://www.adela.com.tw



Your safety is Our concern

We are one of the leading manufacturer and exporters of Industry safety belt in Taiwan since 1993 and enjoyed an excellent reputation throughout our experience of business.

Our main products include full body harness, shock absorbing lanyard, Inman safety belt, lifting sling, tow rope & car seat belt, ratchet tie down strap, personal protection safety belt, carabiner & snap hook hardware accessories etc.

We sure that you will be quite satisfied with our service and the excellent quality if you are searching for a reliable supplier in this field.



Seat Belts, Tie-Downs,
Tow Straps, and Various
Industrial Safety Belts



20t computer type
universal testing machine



Safety belt impact
testing machine, high 6 meter



Item no. RFA-100H



- Housing Features Built-in carry Handle
- 3/20" Galvanized Steel Cable has a Tensile Strength of 3300lbs(1500kgs), Length : 10m
- P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion.
- Features the Tech Load-indicating Swivel hook Attachment.
- Weights only 10.47lbs (4.75kgs)
- Meets the Requirements EN360:2002 & CE

Item no. RFA-100



- Housing features Built-In galvanized steel Swivel Eye.
- 3/20" Galvanized Steel Cable has a Tensile Strength of 3300lbs(1500kgs), Length : 10m
- P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion.
- Features the Tech Load-indicating Swivel hook Attachment.
- Weights only 10.7lbs (4.83kgs)
- Meets the Requirements EN360:2002 & CE0321

Item no. RFA-060W



- Housing Features Built-in galvanized
- 1-8/16" (35mm) Polyester webbing has a Tensile Strength in Excess of 4850lbs(2200kgs), Webbing Length : 6m
- P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion.
- Weight : 9.26lbs(4.2kgs)
- Meets the Requirements EN360:2002 & CE

Web Retractor item no. RFA-015W



- Housing Features Built-in galvanized steel swivel shackle resists corrosion and prevents twisting of the line.
- 1" (25mm) Polyester webbing has a Tensile Strength in Excess of 4410lbs(20kN), Webbing Length : 1.5m with energy absorber & snap hook H-7102
- P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion.
- Weight less than : 1.7lbs(760g)-including snap hook H-7102
- Meets the Requirements EN360:2002 & CE

Item no. RFA-150/RFA-200/RFA-250



RFA-150



RFA-200



RFA-250

- Housing Features Built-in galvanized steel
- Shackle resists corrosion
- 3/20" (4mm) Galvanized Steel Cable has a Tensile Strength of 3080lbs(14kN), Length : RFA-150(15m)/RFA-200(20m)/RFA-250(25m) with snap hook H-5701
- P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion.
- Meets the Requirements EN360:2002 & CE



Aluminum Rescue Tripod Item no.:RT-022

- Designed for durability and light weight, the tripod is easy to set up and transport-aluminum section tripod.
- Cast Aluminum Head has an integral Stainless Steel Pulley to accommodate a winch with quick mount bracket.
- Cable Length : 12m
- Max Height : 2.2m
- Usable load capacity : 330lbs(150kgs)
- Meets the Requirements EN795 & CE



Item No. HS-4501

Standard : CE 0321 EN361 2002 certificated

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Both Thighs quick fit buckles

CE

Various color combined as options



CE EN361



Item No. H-4501

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Detachable waist belt
- Both Thighs quick fit buckles

Item No. H-50

Standard : EN361:2002 compliance

Features :

- 50mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Detachable waist belt
- Both Thighs quick fit buckles



Item No. HD-4501

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest two attaching points
- Detachable waist belt
- Both Thighs quick fit buckles





Item No. HS-4502
Standard : EN361:2002 compliance
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Back support foam pad
- Front chest adjustable belt
- Detachable waist belt
- Both Thighs quick fit buckles



Item No. HS-4503
Standard : EN361:2002 compliance
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Back support foam pad
- Front chest adjustable belt
- Both Thighs quick fit buckles



Item No. HO-4502
Standard : CE 0321 EN361:2002 certificated
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Detachable waist belt equipped / with fasten buckle
- Both Thighs equipped with fasten / buckles



CE EN361



Item No. HBW-4502

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest two attaching points
- Both Thighs quick fit buckles

Item No. HW-23E

Standard : EN361:2002 certificated

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Energy absorber attached to rear / side with snap hook H-2301
- Front chest adjustable belt
- Both Thighs quick fit buckles



Item No. HRS-4501

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Front chest two loops attachments
- Both Thighs quick fit buckles



Item No. HYS-4501

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Front-mounted attaching points
- 1 × Dorsal D-ring
- 2 × lateral D-rings (work positioning)
- Both Thighs quick fit buckles

Item No. HYS-4502

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest one scaffolding / attached point
- Both Thighs tongue buckles



Item No. HYS-4503

Standard : EN361:2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- 2 × lateral D-rings (work positioning)
- Both Thighs tongue buckles



CE EN361:358



Item No. HRV-4501
Standard : EN361:358 2002 compliance
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Waist support pad within two / lateral d-rings
- Both Thighs equipped with fasten / buckles

Vest : 100% polyester with reflective / fluorescent tape

Item No. HRV-4502
Standard : CE 0321 EN361:358 2002 certificated
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Waist support pad within 2 lateral d-rings
- Both Thighs equipped with fasten buckles



CE



Item No. HRV-4503
Standard : EN361 2002 compliance
Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Both Thighs equipped with fasten / buckles

CE EN361:358



Item No. HH-45

Standard : CE 0321 EN361:358 2002 certificated

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles

Item No. HRW-4504

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Waist support pad within 2 lateral d-rings
- Both Thighs quick fit buckles



Item No. HH-452

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest loops attaching points
- Ergonomics back support pad
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles

CE EN361:358



Item No. HRW-4501

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles

Item No. HRW-4502

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles / with support pad foam



Item No. HRW-4503

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Shoulders support pad within / 2 lifting d-rings
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest 2 scaffolding attached points
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles



CE EN361:358



Item No. HW-4501

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles

Item No. HW-4502

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest 2 attaching points
- Waist support pad within 2 lateral d-rings
- Both Thighs quick fit buckles



Item No. HW-4503

Standard : **CE 0321 EN361:358 2002 certificated**

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Waist support pad within / 2 lateral d-rings
- Both Thighs quick fit buckles



CE



CE EN361:358

Item No. HKW-4501

Standard : CE 0321 EN361:358 2002 certificated

Features :

- 45mm width polyester webbing
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest 2 attaching points
- Waist support pad within 2 lateral d-rings / fasten by quick release buckle
- Additional attachments behind two hips
- Both legs support pad with quick / release buckles

Item No. HKW-4502

Standard : EN361:358 2002 compliance

Features :

- 45mm width polyester webbing
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest 2 attaching points
- Ergonomics back support pad
- Waist support pad within 2 lateral d-rings / fasten by quick release buckle
- Additional attachments behind two hips
- Both legs support pad with quick release buckles



Item No. HKW-4503

Standard : CE 0321 EN361:358 2002 certificated

Features :

- 5 anchors attaching points
- 45mm width polyester webbing
- Shoulder straps adjustable
- Ergonomics back support pad
- Waist support pad within 2 lateral d-rings
- Additional attachments behind two hips
- Both legs with support pad / adjustable buckles

CE

CE EN361:358



Item No. HKW-4504

Standard : EN361:358 2002 compliance

Features :

- 5 anchors attaching points
- 45 mm width polyester webbing
- Shoulder straps adjustable
- Waist support pad within 2 lateral d-rings
- Additional attachments behind 2 hips
- Both legs with support pad / adjustable buckles

Item No. HKW-4505

Standard : **CE 0321 EN361:358 2002 certificated**

Features :

- 5 anchors attaching points
- 45 mm width polyester webbing
- Shoulder straps adjustable
- Waist support pad within 2 lateral d-rings
- Additional attachments behind 2 hips
- Both legs with support pad / adjustable buckles




CE

Item No. HH-453

Standard : EN361:358 2002 compliance

Features :

- 45 mm width polyester webbing/ (Reflective tape webbing)
- Front chest adjustable belt
- Shoulder straps adjustable
- Ergonomics back support pad
- Waist support pad within 2 lateral d-rings / fasten by quick release buckle
- Additional attachments behind 2 hips
- Both legs with support pad fasten / by quick release buckles

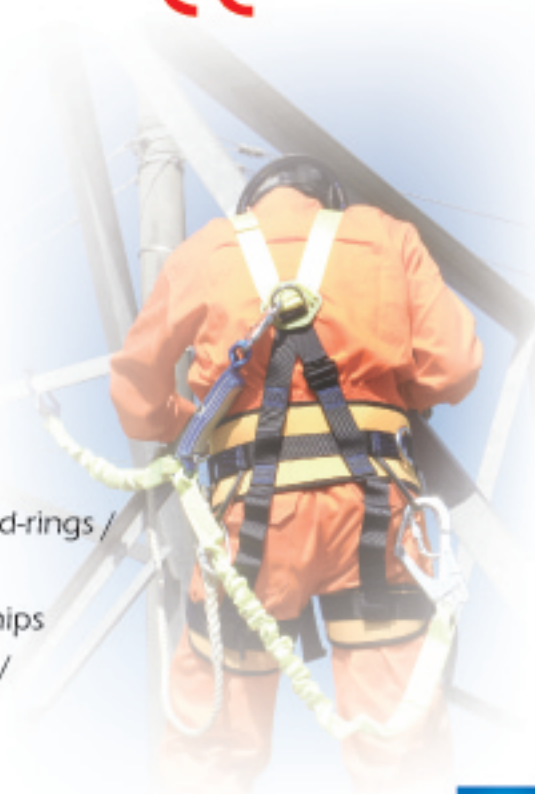

Full Body Harness Kits :



HS-4538E

Item No. HS-4538E

Standard : CE 0321 EN361:354 certificated

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Both Thighs quick fit buckles
- CE 0299 EN354/355
- Dia.14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1



HS-4528E

Item No. HS-4528E

Standard : CE 0321 EN361:354 certificated

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Both Thighs quick fit buckles
- CE 0299 EN354/355
- Dia.14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1



Full Body Harness Kits :



H-4538E

Item No. H-4538E

Standard : EN361:354 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Detachable waist belt
- Both Thighs quick fit buckles
- CE 0299 EN354/355
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1



H-4528E

Item No. H-4528E

Standard : EN361:354 compliance

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Detachable waist belt
- Both Thighs quick fit buckles
- CE 0299 EN354/355
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

Full Body Harness Kits :



HD-4538E

Item No. HD-4538E

Standard : **EN361:354 compliance**

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest two attaching points
- Detachable waist belt
- Both Thighs quick fit buckles
- **CE 0299 EN354/355**
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1



HD-4528E

Item No. HD-4528E

Standard : **EN361:354 compliance**

Features :

- 45mm width polyester webbing
- 1 × Dorsal D-ring
- Front chest adjustable belt
- Shoulder straps adjustable
- Front chest two attaching points
- Detachable waist belt
- Both Thighs quick fit buckles
- **CE 0299 EN354/355**
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1



H1
H-309
H-209



H

3 strands rope Lanyard
H1

- Dia. 14mm X 1.5M
- Loop at ends

H-309

- CE 0299 EN354
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

H-209

- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1



EF1
EF-31
EF-21



EF

Energy Absorbing Rope Lanyard
EF1

- Dia. 14mm X 1.5M
- Energy absorber E-45

EF-31

- CE 0299 EN354/355
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

EF-21

- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1



EF2
EF-32
EF-22



EF2

Energy Absorbing Y Lanyard
EF2


- Dia. 14mm X 1.5M
- Energy absorber E-45

EF-32

- CE 0299 EN354/355
- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

EF-22


- Dia. 14mm X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2

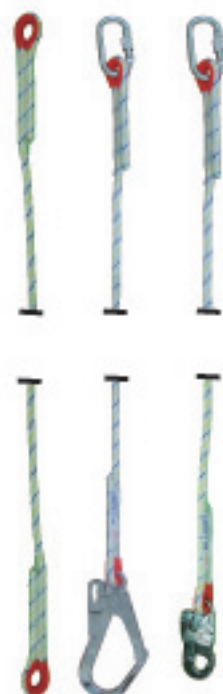

W1

W-309

W-209

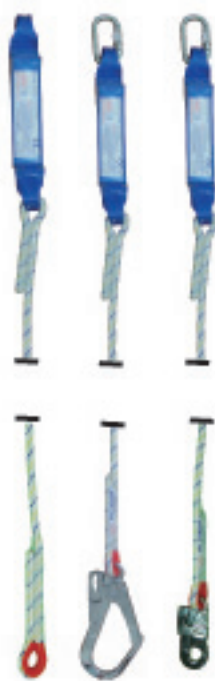

EW1

EW-31

EW-21



EW2

EW-32

EW-22



W

Kernmantle Rope Lanyard

W1

- Dia.12mm X 1.5M
- Loop at ends

W-309

- CE 0299 EN354
- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

W-209

- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EW

Kernmantle Rope-Energy Absorbing Lanyard

EW1

- Dia.12mm X 1.5M
- Energy absorber E-45

EW-31

- CE 0299 EN354/355
- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

EW-21

- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EW2

Kernmantle Rope Energy Absorbing Lanyard-Twin leg

EW2


- Dia.12mm X 1.5M
- Energy absorber E-45

EW-32

- CE 0299 EN354/355
- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

EW-22

- Dia.13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2

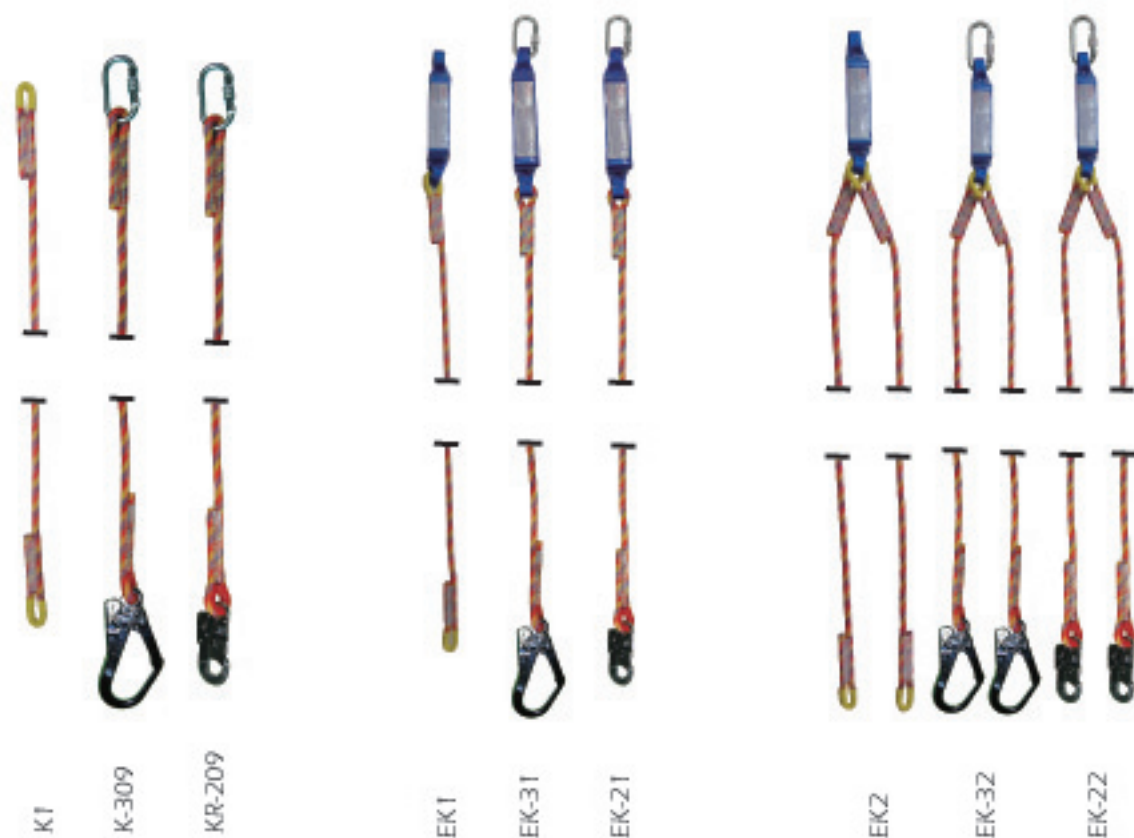

K

Kernmantle Rope Lanyard
K1

- Dia. 13mm X 1.5M
- Loop at ends

K-309

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

K-209

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EK

Kernmantle Rope-Energy
Absorbing Lanyard

EK1

- Dia. 13mm X 1.5M
- Energy absorber E-45

EK-31

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

EK-21

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EK2

Kernmantle Rope Energy
Absorbing Lanyard-Twin leg
EK2




- Dia. 13mm X 1.5M
- Energy absorber E-45

EK-32

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

EK-22

- Dia. 13mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2

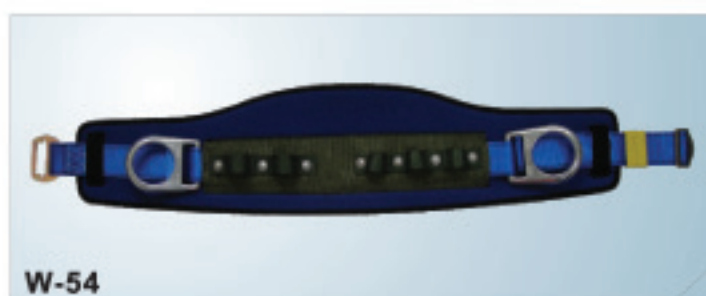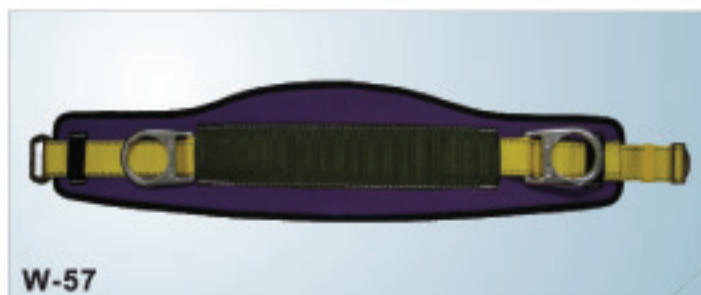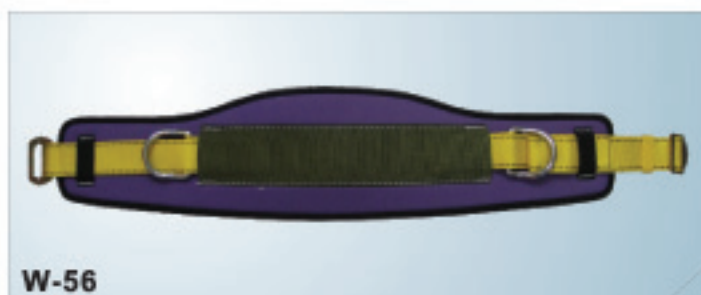

H-272D

Position Belt: 45 mm width X 1.2M length
Subsidiary Rope: 14mm polyester rope with rope grab H-2707 and connector H-2101

H-27BU

Position Belt: 45 mm width X 1.2M length
Subsidiary Rope: 14mm polyester rope with rope grab H-2707 and connector H-2101



L1
L-309
L-209



EL1
WF-31
WF-21



EL2
WF-32
WF-22

L

Webbing Lanyard

L1

- 45mm wide X 1.5M

L-309

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

L-209

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EL

Energy Absorbing
Lanyard-Single Webbing
EL1

- 45mm wide X 1.5M
- Energy absorber E-45

WF-31

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

WF-21

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

EL2

Energy Absorbing Webbing
Lanyard-Twin leg
EL2


- 45mm wide X 1.5M
- Energy absorber E-45

WF-32

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

WF-22

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2

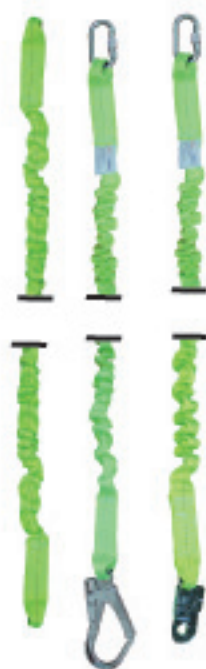

WL1
WL-309
WL-209
CE

WL

Elastic Webbing Lanyard
WL1


- 45mm wide X 1.5M

WL-309

- CE 0299 EN354
- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

WL-209

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

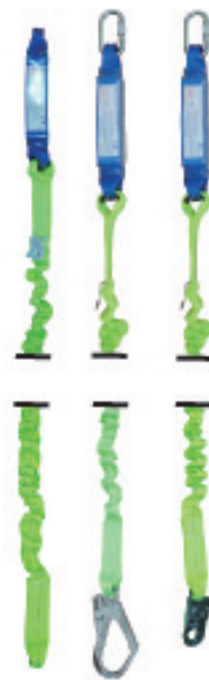

WFL1
WFL-31
WFL-21
CE

WFL

Energy Absorbing Elastic
Lanyard-Single Webbing
WFL1


- 45mm wide X 1.5M
- Energy absorber E-45

WFL-31

- CE 0299 EN354/355
- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

WFL-21

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

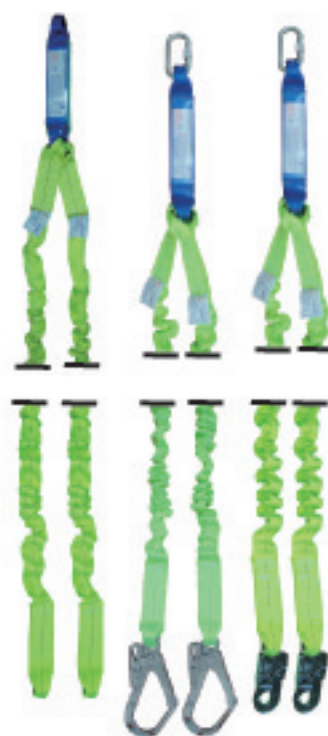

WFL2
WFL-32
WFL-22
CE

WFL2

Energy Absorbing Elastic
Webbing Lanyard-Twin leg
WFL2

- 45mm wide X 1.5M
- Energy absorber E-45

WFL-32

- CE 0299 EN354/355
- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

WFL-22

- 45mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2

CE EN358

Item No. H-41
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
1 x "D" ring
1 x adjusting loop
1 x double-lock snap hook
H-4101 Ø20mm
1 x rope hook bag
1 x bundle of belt



Item No. H-42
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
2 x "D" ring
2 x adjusting loop
1 x double-lock snap hook
H-4101 Ø20mm
1 x rope hook bag
1 x bundle of belt



Item No. H-21
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
1 x "D" ring
1 x adjusting loop
1 x double-lock snap hook
H-2101 Ø18mm
1 x rope hook bag
1 x bundle of belt





Item No. H-22
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
2 x "D" ring
2 x adjusting loop
1 x double - lock snap hook
H-2101 Ø18mm
1 x rope hook bag
1 x bundle of belt

Item No. H-31
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
1 x "D" ring
1 x adjusting loop
1 x double - lock snap hook
H-3101 Ø53mm
1 x rope hook bag
1 x bundle of belt



Item No. H-32
Specification:
Belt: 50mm (2") x 1.2m belt
Rope: 14mm x 1.5m
1 x buckle
2 x "D" ring
2 x adjusting loop
1 x double - lock snap hook
H-3101 Ø53mm
1 x rope hook bag
1 x bundle of belt

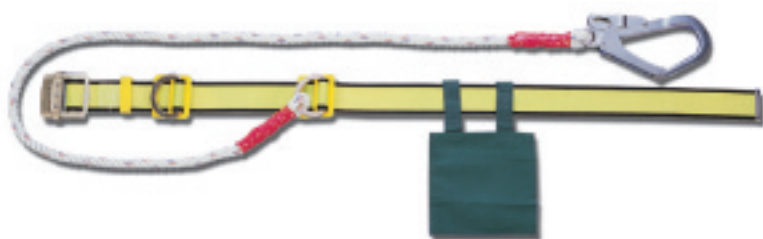

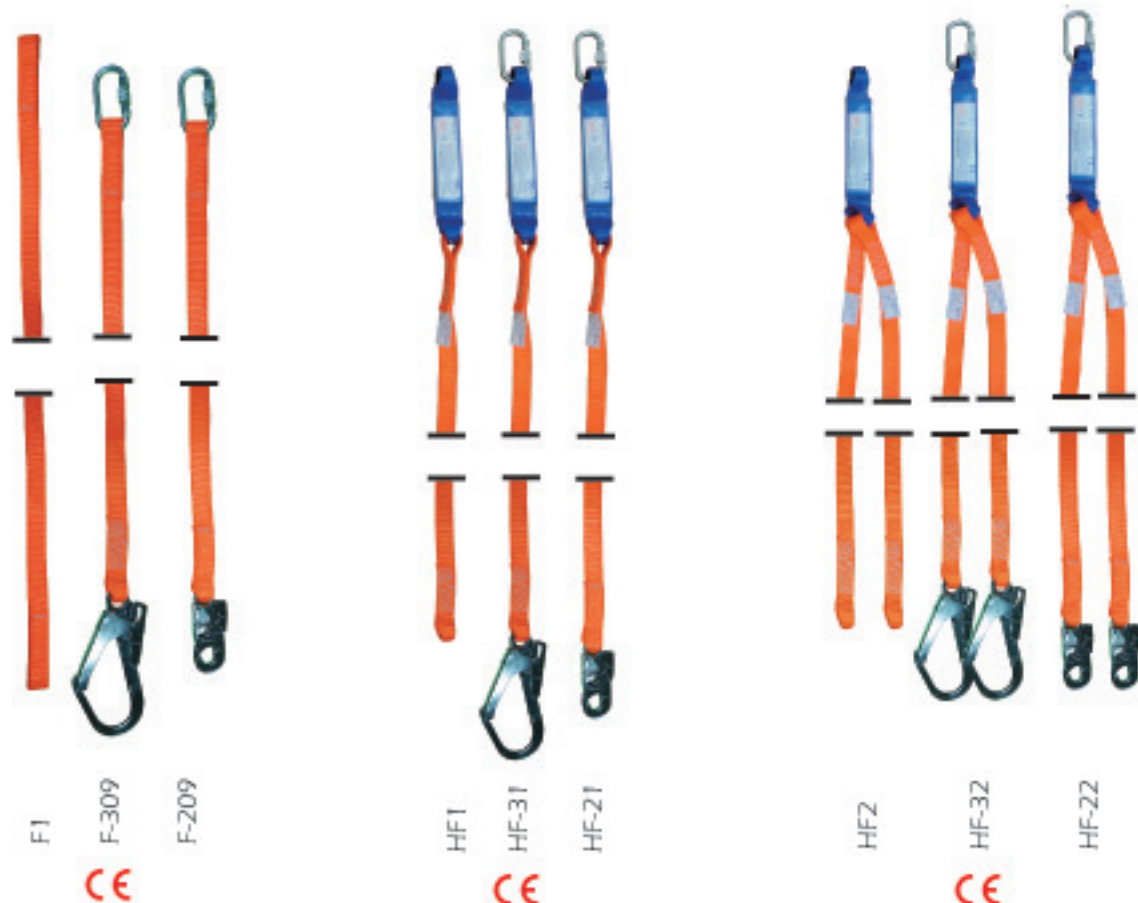

F

Webbing Lanyard

F1

- 30.5mm wide X 1.5M.

F-309

- CE 0299 EN354
- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

F-209

- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

HF

Energy Absorbing Lanyard-Single Webbing

HF1

- 30.5mm wide X 1.5M
- Energy absorber E-45

HF-31

- CE 0299 EN354/355
- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X1

HF-21

- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X1

HF2

Energy Absorbing Webbing Lanyard-Twin leg

HF2

- 30.5mm wide X 1.5M
- Energy absorber E-45

HF-32

- CE 0299 EN354/355
- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-3101 X2

HF-22

- 30.5mm wide X 1.5M
- Screw-lock carabiner X1
- Hook H-2101 X2



Vertical & Horizontal fall arrester lanyard
VH-6708L

Rope stopper with connector EN362 approved AF-09
Polyester rope :16mm
Length: 15M(option)
Connector hook EN362 approved H-3101

Vertical & Horizontal fall arrester lanyard
VH-2206L

Rope stopper with connector EN362 approved AF-09
Kernmantle rope:12mm
Length:15M(option)
Connector hook EN362 approved H-2401



Sewn Slings

CR-2060 、2080 、2010 、2012 、2015

To set up a belay or an anchor or to extend an anchor point
Width: 20mm nylon webbing
Length: 60cm,80cm,100cm,120cm 150cm available
Strength:18kN

Daisy chain sling



CRD-13

For aid climbing only not to be used as part of
personal anchor system

Width: 20mm nylon webbing

Length: 170cm

Pocket: 13

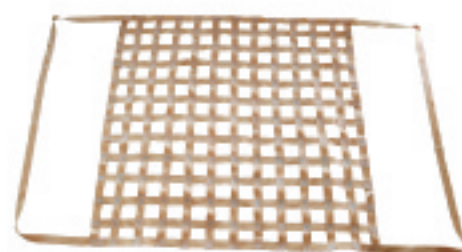

Safety Net

SN-5X5 、6X6 、8X8 、10X10

Material: Polyester (2.0mm)

Width:2" (50mm)

Size: by feet

5X5 、6X6 、8X8 、10X10

Portable Horizontal lifelines

PH-5020M

2" ratch handle

Polyester Webbing (2.4mm)

Webbing length: 20M(option)

Width:1.5" (38mm)



Tool lanyard
TL1-001



High strength Polyester bicolor / webbing
Width: 20mm
Working length: 0.3 - 1.1M
Double self-lock karabiners 8mm
SWL: 3kgs

Tool lanyard
TL1-002



High strength Polyester bicolor / webbing
Width: 20mm
Working length: 0.6 - 1.2M
Adjustable barrel lock
Single self-lock karabiners 8mm
SWL: 3kgs

Tool lanyard
TL1-003



High strength Polyester bicolor / webbing
Width: 20mm
Working length: 0.7 - 1.2M
Adjustable barrel lock with / detachable buckle
Self-lock karabiners 8mm
SWL: 3kgs

Tool lanyard
TL2-001



High strength Polyester webbing
Width: 18mm
Working length: 0.6 - 1.2M
Double self-lock karabiners 8mm
SWL: 3kgs

Tool lanyard
TL2-002



High strength Polyester webbing
Width: 18mm
Working length: 0.7 - 1.3M
Adjustable barrel lock
Single self-lock karabiners 8mm
SWL: 3kgs

Tool lanyard
TL2-003



High strength Polyester webbing
Width: 18mm
Working length: 0.6 - 1.1M
Adjustable barrel lock
Swivel snap hook
SWL: 3kgs

Tool lanyard
TL3-001



High strength Polyester elastic / webbing
Width: 16mm
Working length: 0.7 - 1.6M
End of connector (option)
SWL: 3kgs

Tool lanyard
TL3-002



High strength Polyester elastic / webbing
Width: 16mm
Working length: 0.7 - 1.6M
End of connector (option)
Fixed double spring hook / screw lock 3mm
SWL: 3kgs

Wrist Lanyard
TW-001



23mm width Velcro belt
Available 26.3cm length
Adjustable barrel lock

CE EN358

Item No. H-27

Specification:

Belt: 45mm belt

Rope: 14mm x 2m rope

- 1 x buckle
- 1 x "D" ring
- 1 x tetragonal ring
- 1 x double - lock snap hook
- H-2101 Ø18mm
- 1 x bundle of belt
- 1 x sliding handle
- 1 x cushion belt



Item No. H-37

Specification:

Belt: 45mm belt

Rope: 14mm x 2m rope

- 1 x buckle
- 1 x "D" ring
- 1 x tetragonal ring
- 1 x double - lock snap hook
- H-3101 Ø53mm
- 1 x bundle of belt
- 1 x sliding handle
- 1 x cushion belt



Item No. H-227

Specification:

Belt: 45mm Nylon belt

Rope: 14mm x 2m Nylon rope

- 1 x buckle
- 2 x "D" ring
- 1 x tetragonal ring
- 1 x double - lock snap hook
- H-2101 Ø18mm
- 1 x cushion belt
- 1 x bundle of belt
- 1 x sliding handle




Item No. H-607

Specification:

Belt: 45mm belt

Rope: 19mm x 2m rope

- 1 x buckle
- 2 x "D" ring
- 1 x tetragonal ring
- 1 x cushion belt
- 1 x bundle of belt
- 1 x rolling double-lock swivel snap hook
- H-6701 Ø21mm
- 1 x sliding handle
- 1 x "8" ring

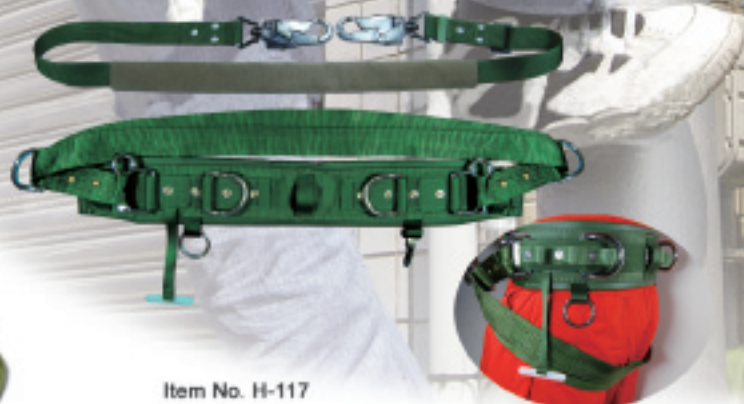

Item No. SC-19

Specification:

Belt: 45 mm x 1.3m length joint with a bottom / support belt to reduce body gravity for long hanging position. Cushion belt aid with multi-function tools accessory anchors

Subsidiary belt:

Width : 45mm

Length : 2M / 2 swivel hooks H-6702 with artificial leather avoid of friction.



Item No. H-117

Specification:

Belt: 45mm (2") x 1.2m belt

Webbing: 45mm x 2m nylon webbing


- 1 x double - lock buckle
- 3 x "D" ring
- 1 x adjusting loop
- 1 x cushion belt
- 1 x leather cove
- 2 x bundle of belt
- 2 x rolling double-lock swivel snap hook
- H-6702 Ø21mm
- 1 x rope hook bag
- 1 x tetragonal ring



Model No	Length (Option)	Safety working loads (SWL)	Breaking Strength (B/S)
AT-50	6 - 10M	1500 - 2500 KGF	3000 - 5000 KGF
AT-35	3 - 8M	750 - 1500 KGF	1500 - 3000 KGF
AT-25	1 - 5M	350 KGF	700 KGF
AP-35S	1 - 5M	900 KG	700 KGF
AP-5S	1 - 5M	350 KG	700 KGF
AP-25	2 - 5M	125 KG	250 KG



Model No. For Example: **AT - 50 x** (LENGTH IS AN OPTION)
 Length :m or feet
 Width :mm
 Model




Detachable Ratchet Tie Down
(Hundreds of base only require one handle)

Description:
Ratchet buckle: 1.5", 2", 4" (inch)
Base handle: sell by pair
Webbing length is option

STANDARD MODEL SPECIFICATION

Model No	Strap Width (A) mm	Loop Length (C) mm	Sewing Length (D) mm	Loop Width (E) mm	Length (B) mm
AUL-25	25	300	300	25	1m ~ 10m
AUL-50	50	350	350	25	
AUL-75	75	400	400	35-40	1.5m ~ 10m
AUL-100	100	400	400	45-50	
AUL-125	125	470	500	65-70	2m ~ 10m
AUL-150	150	470	500	80-85	



Model No. Example: **AUL-75 x 2M** (LENGTH IS AN OPTION)
 — Length (B):m
 — Strap Width (A):mm
 — Model

SAFE WORKING LOAD (SWL)

HANGING METHOD	BREAKING STRENGTH	SAFE WORKING LOADS (SAFETY FACTOR 6)					
		VERTICAL STRAIGHT LIFT	CHOKER	BASKET			
				90°	60°	45°	30°
MODEL							
AUL-25	5000 Kgf	850 Kgf	650 Kgf	1700 Kgf	1470 Kgf	1190 Kgf	850 Kgf
AUL-50	12000	2000	1600	4000	3440	2880	2000
AUL-75	17500	2910	2320	5820	5000	4070	2910
AUL-100	21000	3500	2800	7000	6020	4900	3500
AUL-125	24000	4000	3200	8000	6880	5600	4000
AUL-150	28000	4500	3500	9000	7500	6100	4500

Rescue Harness



CH-4501



CH-4502

Manhole Rescue Belt MB-08



Lifeline Rope



H-29

H-39

Combine safety rope
Length: 2m~30m
Diameter: 14mm, 16mm

Tools Fall Arrest Device



RV-21



RV-22

Traffic Cone




CS-551
45 cm


CS-552
70 cm

CS-553
90 cm

Vertical Lifeline



H-2621 on twisted □14mm



H-6621 on twisted □16mm



H-8621 on twisted □16mm



Safety Helmet



CS-661

CS-664

CS-663

Reflective Vest



RV-01



RV-02



RV-03



RV-11



RV-12



RV-13

Variety Safety Rope





Item No. S-15
Width : 1 3/8"
Extension length: 4.05M
Breaking strength (B/S): 1450 KGF
Material : Polyester



Item No. S-25
Width : 1 3/4"
Extension length: 4.05M
Breaking strength (B/S): 2500 KGF
Material : Polyester



Item No. SP-30
Width : 2"
Extension length: 4 ~ 8 M
Breaking strength (B/S): 3000 KGF
Material : Polyester



Item No. S-40
Width : 2 1/2"
Extension length: 4.05M
Breaking strength (B/S): 4000 KGF
Material : Polyester



Item No. SH-80
Width : 3 1/4"
Extension length: 4.05M
Breaking strength (B/S): 8000 KGF
Material : Polyester



Item No. S-80
Width : 3 1/4"
Extension length: 4.05M
Breaking strength (B/S): 8000 KGF
Material : Polyester

ADELA Enterprise Co.,Ltd. established in 1993 , started with automobile belt and related metal accessories . Within 20 years dedicated to the Industrial Safety Belt ,our ADELA brand have been well know as specialist in variety of Industrial Safety Belts and Personal Protection Equipment (P.P.E.), Fall arrest lanyard , Vertical fall arrest system, and related Safety hardware accessories. In the recent years we also been engaged in Outdoor activities in Climbing and Rescue devices.

Based on a persistence of "Your Safety Is Our Concern",our products have been greatly exported to Europe, Asia, Mid-East, South U.S.A. With our quick response and specializing in tailored project which gain trust and satisfaction from customers. We are ISO-9001:2008 certified and CE certificated in majority lines , we are capable in in-house examining by "Tensile Strength" & Height Impaction" ,with demanding quality control we ensure you safe and secure when using our products.

We will put us in the par with the finest and staying ahead of the leading ship especially the customer's demand will be our priority. If you are looking for a reliable supplier we ensure a long and mutually relationship.



 EN362 H-3101	 EN362 H-7101	 EN362 H-7102	 EN362 H-7105
 EN362 H-2101	 EN362 H-4101	 EN362 H-6701	 EN567 AF-7206R
 EN362 AF-75	 EN362 AF-76B	 EN362 AF-77C	 EN567 AF-7206L
 EN362 AF-80B	 EN362 AF-81	 EN362 AF-09	 EN362 AF-18B
 EN362 AF-10	 EN362 AF-11	 EN362 AF-15	 EN362 AF-16
 ANSI H-6102	 ANSI H-2501	<div data-bbox="2199 1506 2816 1964"> <p>CE Item: RFA-100(EN360)10M</p>  <ul style="list-style-type: none"> ● Housing features Built-in galvanized steel Swivel Eye. ● 3/20" Galvanized Steel Cable has a Tensile Strength of 3300lbs(1500kgs), Length : 10M ● P.P Housing and Drum are Durable and lightweight and Resistant to Corrosion. ● Features the Tech Load-Indicating swivel hook Attachment. ● Weights only 10.7lbs (4.83kgs) ● Certification EN360:2002 & CE0321 </div>	
 H-7110(110mm)	 H-3105		